

REALWOOD

REALWOOD

REALWOOD COLLECTION

PARÉ INNOVATIONS PVT. LTD.

Headquarters: 101-103, Jai Commercial Complex, Cadbury Junction, Thane (w), Maharashtra, India- 400601

Experience Center: 21/N, Laxmi Industrial Estate, Andheri (w), Maharashtra, India-400053.

+91 8356954856 hello@pareindia.com www.pareindia.com

Follow Us



PARÉ

PARE

PARE Innovations is a premier industry player in the interior design space. As the name suggests, we primarily deal into innovative surfaces for interior as well as exterior surfaces. PARE Soffit systems are one of our latest Innovations.



“Inspired by
the meticulous, captivating and exquisite
aspects of nature”

REAL WOOD COLLECTION

REAL WOOD

THE STUNNING
BEAUTY OF
REAL WOOD
IN YOUR SPACE



WITH NONE OF THE
DOWNSIDES

DOWNSIDES

REALWOOD

ARTISAN
OAK

IMPERIAL
NUT

INTRODUCING
PARÉ
SOFFIT

REALWOOD COLLECTION

REAL WOOD
Collection



Artisan Oak



Imperial Nut

MADE IN
INDIA



Features

PARÉ presents a fusion of Real wood look & modern technology with Soffit Systems.




Product Sizing

Soffit Panels



J-Trim

Perimeter profile
3060/4000

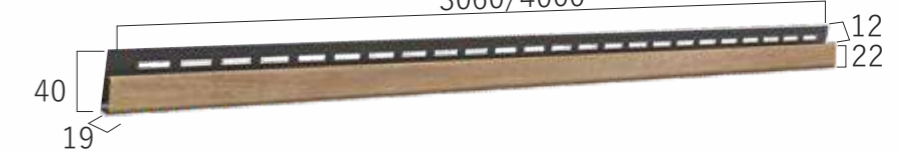

T-Trim

Connector Profile
3060/4000



Inside Corner Profile

3060



Outside Corner Profile

3060



**Sizing in mm



**INVEST IN THE
FUTURE.**

TECHNICAL DECLARATION

TECHNICAL DECLARATION

Fire retardant:

PARE Soffit and its accessories comply with Ball-pressure, Needle flame and Glow-wire test. Along with that, it also complies with UL94 V0 test acquiring a class 1 flammability rating when tested in accordance to IS 10151.

Cold resistance:

PARE Soffit and its accessories comply with cold duration test (-20 degrees) in accordance with IS 10151.

Anti-Bacterial:

PARE Soffit and its accessories were tested with 1000 cfu/ml of various different fungi and bacteria; within 30 seconds, the value is reduced to 0 cfu/ml thus making it a truly anti-bacterial product.

Product Specifications:

Meets or exceeds the standard specification of (ASTM D-4477) and its referenced documents. Where not defined in ASTM D-4477, our products also meet the stringent quality control parameters of **PARE**.

Relevant Codes and Regulations Compliance:

Conforms to ASTM Specifications D-4477

Colour: Uniformity is spectrophotometrically controlled.

Lock: Optically measured and controlled.

Product Test Data:

TESTS	RESULTS
Impact resistance:	No deformation observed. (Tested at 50 LBS)
Tensile strength, MPa:	>37.0
Tensile modulus, MPa:	>2000
Surface distortion:	None at 120F
Length:	Within 1/4" of specification
Lock control:	Complies
Color Change:	<2 grayscales (16 hrs under 1200W/m2 UV radiation at 50 degrees)
Squareness	<1/8" of square

Declared Performance:

Essential Characteristic	Performance	Harmonised Technical Specification
Reaction to fire EN 13501-1	D-s3;d0	EN 13245-2:2009/AC:2010
Release of Dangerous substance	NPD	
Durability	A.4.65	

